

BRANDYWINE FORGE

201 North 4th Ave. #5 Royersford PA 19468


Phone: 610-948-5116 Fax: 610-948-9629

<http://www.bvforge.com>

Installation dimensions for flush installation

Feel Free to modify this drawing to include the specifics of your situation.

Add molding detail, additional trim, or storm windows if installed.

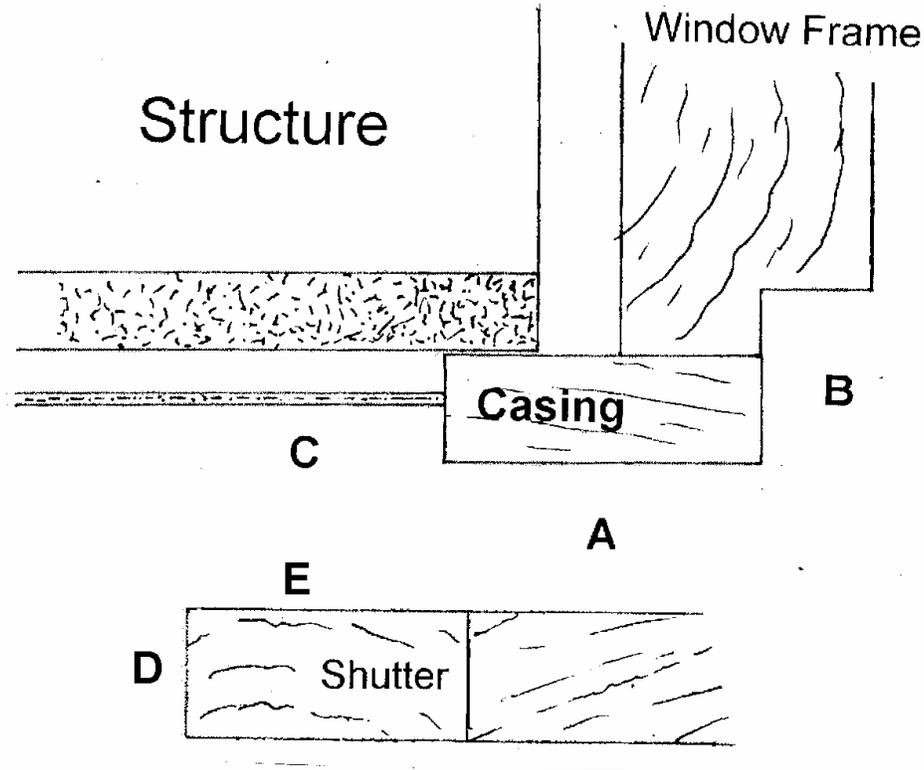

of similar windows _____ Situation (MI, OP) _____

Dim	What and Why we need to know	Measurement
A	The width of the casing where the pintles will install. This dimension is most important since it will determine the type of pintle that can be used.	
B	The depth available from the face of the case to accept a closed shutter. Measure the minimum available space. If there are storm windows installed, measure to them.	
C	Dimension from face of case to the face of the structure. Negative if inset from case.	
D	Thickness of shutter. Just to make sure everything will work as planned.	
E	Width of shutter stile. We like to place the first fastener in the middle just so it looks right.	